


2-4 ZONE FIRE ALARM CONTROL PANEL

RELIABLE | SAFE | EASY TO OPERATE

Model No.
MS-202

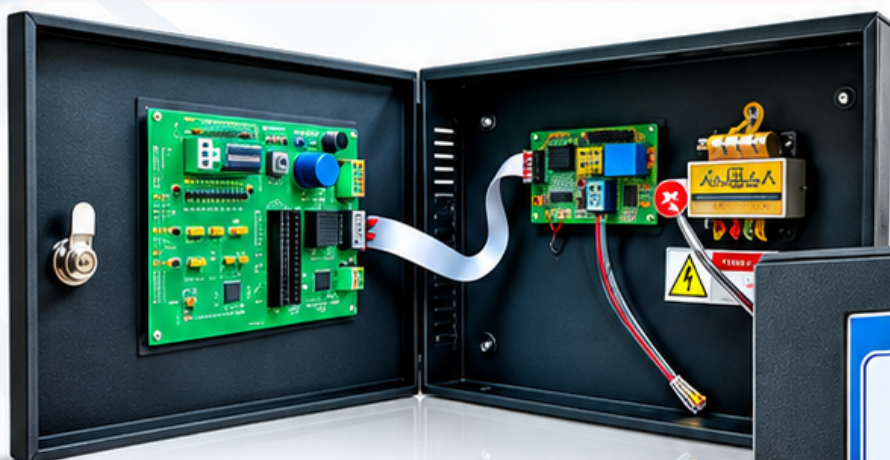

FEATURES

-  Fully Conform IS 2189.
-  Zone Wise Fire Fault LED indication.
-  Potential Free Contact Facility.
-  External 24v for reset, silence, lamp test.
-  Inbuilt Buzzer 16x2 line LCD display.
-  Inbuilt Battery charger & Battery space.
-  Operate on 230 V 50 Hz AC supply
Potential free contact facility.



TECHNICAL SPECIFICATION

Power Up	230V AC 24v dc optional
Power Consumption	30watt
End of Line	4k7
No. of Zone	2- 4
Detection (OP Supply)	24v dc
Indoor (OP Supply)	24v dc
Operating Temperature	0-60°
Operating Humidity	96% (Non condensing)
Operation	Operate on 230 V 50 Hz AC supply Potential free contact facility.



MECHANICAL SPECIFICATION

Cabinet Type	MS
Colour	OFF White / Red / Dark Grey
Paint	Powder Coating
Knock Out	18mm
Dimensions	320 x 208 x 55mm
Weight	3.3kg Without Battery



Commercial
Buildings



Industrial
Units



Hospitals



Schools